Selas TFR Package Burners

TFR Burner B-80

| Parameter | Specifications | | | | |
|---|-------------------------|---------------|--|--|--|
| Integral Blower Motor, 60 Hz (HP) | 1/2 | | | | |
| Maximum Innut BTH/hr//kM/1 | Integral Blower | 477,000 (126) | | | |
| Maximum Input, BTU/hr (kW)¹ | External Blower | 973,000 (257) | | | |
| Low Firing Rate, BTU/hr (kW)¹ | 50,000 (13) | | | | |
| Pilot Output, BTU/hr (kW)¹ | 50,000 (13) | | | | |
| Nominal Operating Gas Pressure at Burner H "w.c. (mbar) ² - Natural Gas | 4.8 (12) | | | | |
| Nominal Operating Air Pressure at Burner Ho "w.c. (mbar) ² | 4.6 (11) | | | | |
| Tube Diameter, inches (mm) | 3 (77) | | | | |
| Maximum Tube Length, ft . (m) | 30 (9.1) | | | | |
| Piping | NPT | | | | |
| Ignition Type | Pilot | | | | |
| Flame Detection | Flame rod or UV scanner | | | | |
| Fuels | Natural Gas or Propane | | | | |
| Conformance | NFPA*86 C US | | | | |

All imperial inputs based on gross calorific values (HHV). All metric inputs based on net calorific values (LHV).

1 Maximum, low fire, and pilot inputs are given for the standard, integral air blowers at 1,000 ft elevation. Higher elevations may require a larger capacity blower.

2 Values are given for integral blower arrangement at high fire.

Test conditions: Natural gas, Max input at 3% excess O_2 , Low fire at 19% excess O_2 , test fired into effective tube length of 28′.

NOTE: All values are approximate. To check if packages meet other agency requirements, contact the factory. Packages meant for indoor use.


NOTICE: Selas practices a policy of continuous improvement in the design of its products. It reserves the right to change the specifications at any time without prior notice.




Data Sheet

Selas TFR Package Burners

Dimensions



| Tube Size | В | С | D | E | G | Н | J | K | M | N | Р | R | Gas Inlet |
|--------------|--------|--------|--------|--------|---|--------|---|-------|--------|---|---|-------|--------------|
| 3 | 16-3/4 | 14-5/8 | 3-5/32 | 12-1/4 | 1 | 17-1/8 | 7 | 4-3/8 | 10-7/8 | 4 | 6 | 16 mm | 1" NPT |

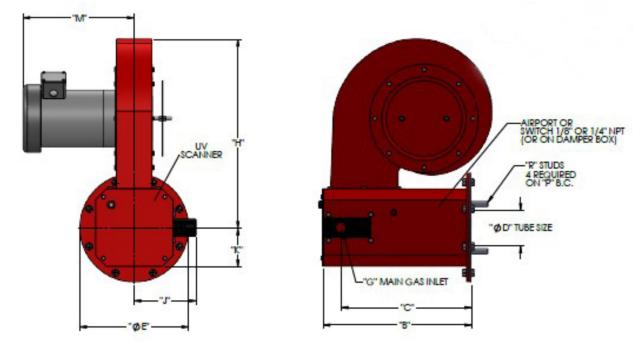


NOTE: All dimensions are in inches $\pm 1/8$. Blower mounted sideways on casing w/motor facing mounting plate when no gas train is required. "M" dimension approximate, dependent on motor manufacturer. Dimensions subject to change without notice. Blower may be mounted in other configurations.



Data Sheet

Selas TFR Package Burners

Dimensions (continued)

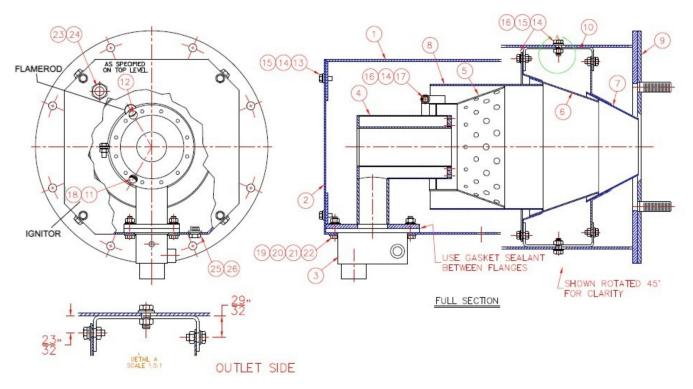

Mounting

