

Selas Superflame™ Burners

Superflame™ 5000

Capacity: 5,000,000 Btu/hr (1319kW)

Parameter	Burner Velocity		Superflame™ 5000
Maximum Input, Btu/hr (kW)¹	Medium and High Velocity		5,000,000 (1319)
Minimum Input, Btu/hr (kW)¹ <i>For lower inputs, contact Selas</i>	Medium and High Velocity		500,000 (132)
Minimum Input Fixed Air, Btu/hr (kW)¹	Medium and High Velocity		125,000 (33)
Main Gas Inlet Pressure, "w.c. (mbar)	High Velocity	Natural Gas	13 (32)
	Medium Velocity	Natural Gas	9 (22)
Air Inlet Pressure, "w.c. (mbar)	High Velocity	Natural Gas	17 (42)
	Medium Velocity	Natural Gas	12 (30)
High Fire Visible Flame Length, inches (mm)	High Velocity	Natural Gas	77 (1960)
	Medium Velocity	Natural Gas	90 (2290)
Approximate Flame Velocity, ft/s (m/s)	High Velocity		415 (127)
	Medium Velocity		275 (84)
Maximum Combustion Air Temperature	700°F (371°C)		
Flame Detection	Flame rods or UV scanners can be used with all combustors, any gaseous fuel ² , and up to the maximum operating temperature.		
Fuels	Natural Gas ²		

1. All imperial inputs based upon gross calorific values (HHV). All metric inputs based upon net calorific values (LHV).
2. Consult Selas for other fuels.
3. Other notes:
 - All information is based on laboratory testing in neutral (0 "w.c., 0 mbar) pressure chamber. Different chamber conditions may affect emissions and pressure.
 - All information is based on standard outer tube design. Changes in combustor will alter performance and pressures.
 - All inputs based upon standard conditions; 1 atmosphere, 70°F (21°C).
 - Selas reserves the right to change the construction and/or configuration of our products at any time without being obliged to adjust earlier supplies accordingly.
 - Plumbing of air and gas will affect accuracy of orifice readings. All information is based on generally acceptable air and gas piping practices.




The Heat Technology Company™


Selas Superflame™ Burners

Performance Graphs, Imperial

SuperFlame 5000 Natural Gas Pressure

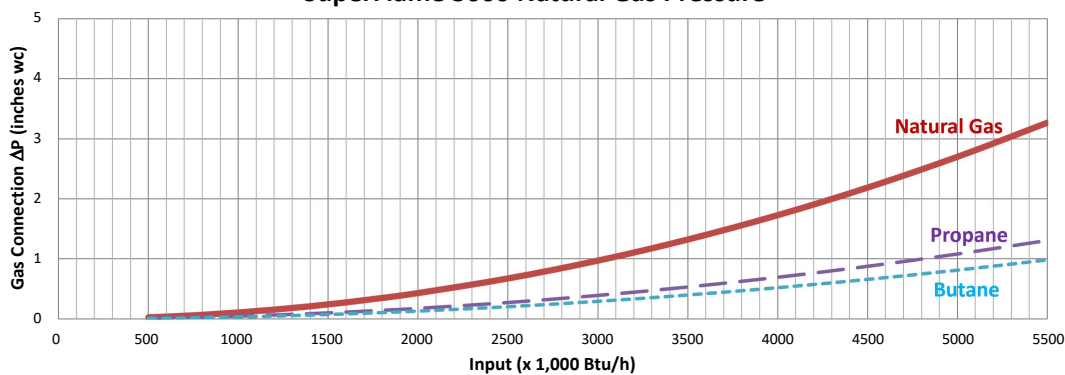


SuperFlame 5000 Air Pressure

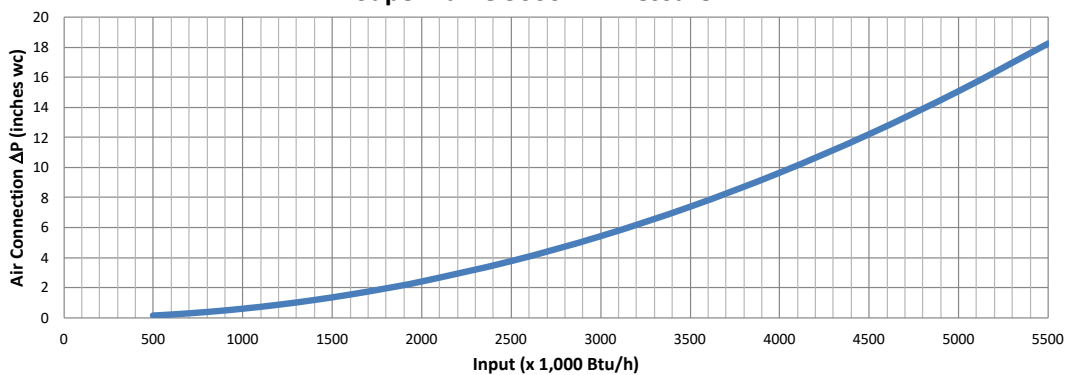

SuperFlame 5000 NOx Emissions




Furnace at 1600°F; Burner at 10% Excess Air

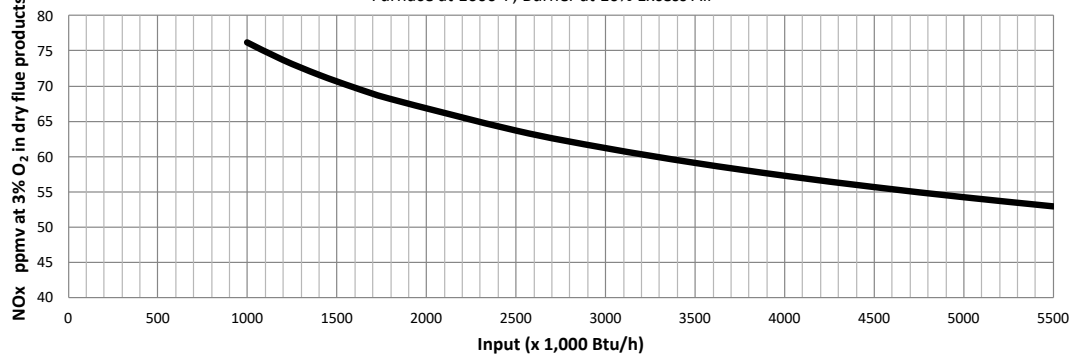

The Heat Technology Company™

Selas Superflame™ Burners


Performance Graphs, Metric

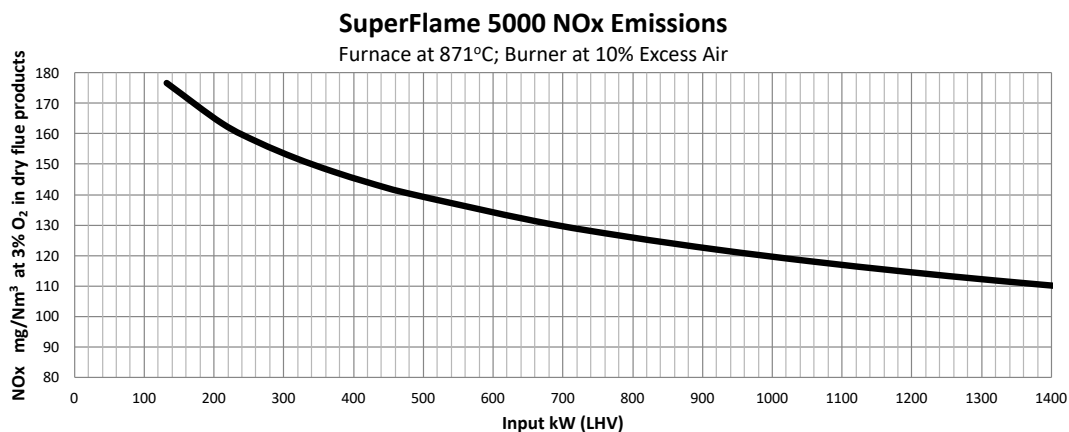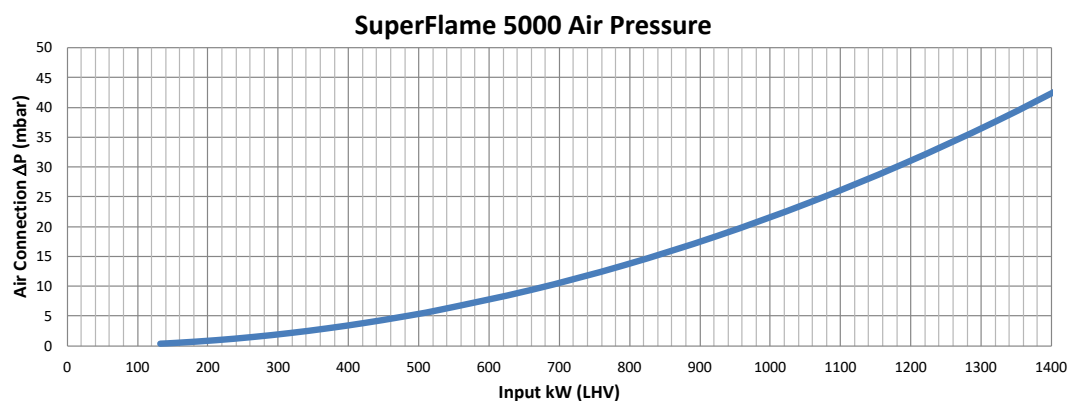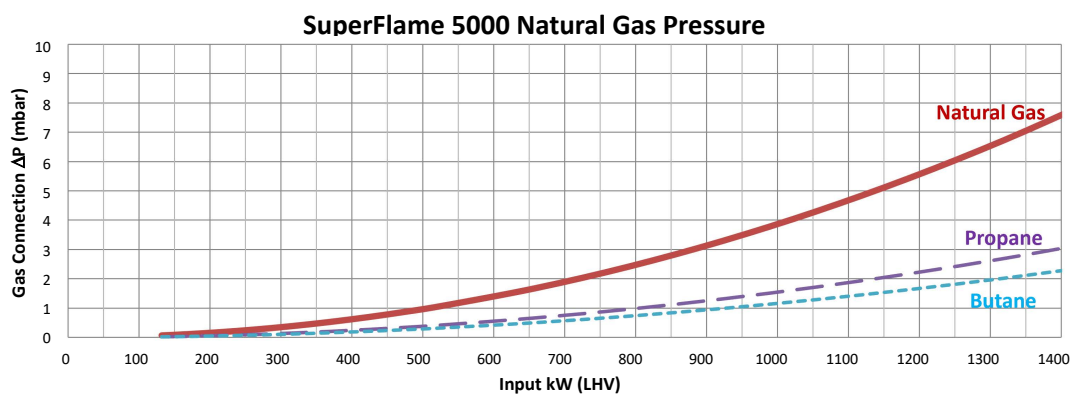

The Heat Technology Company™

Data Sheet

Selas Superflame™ Burners

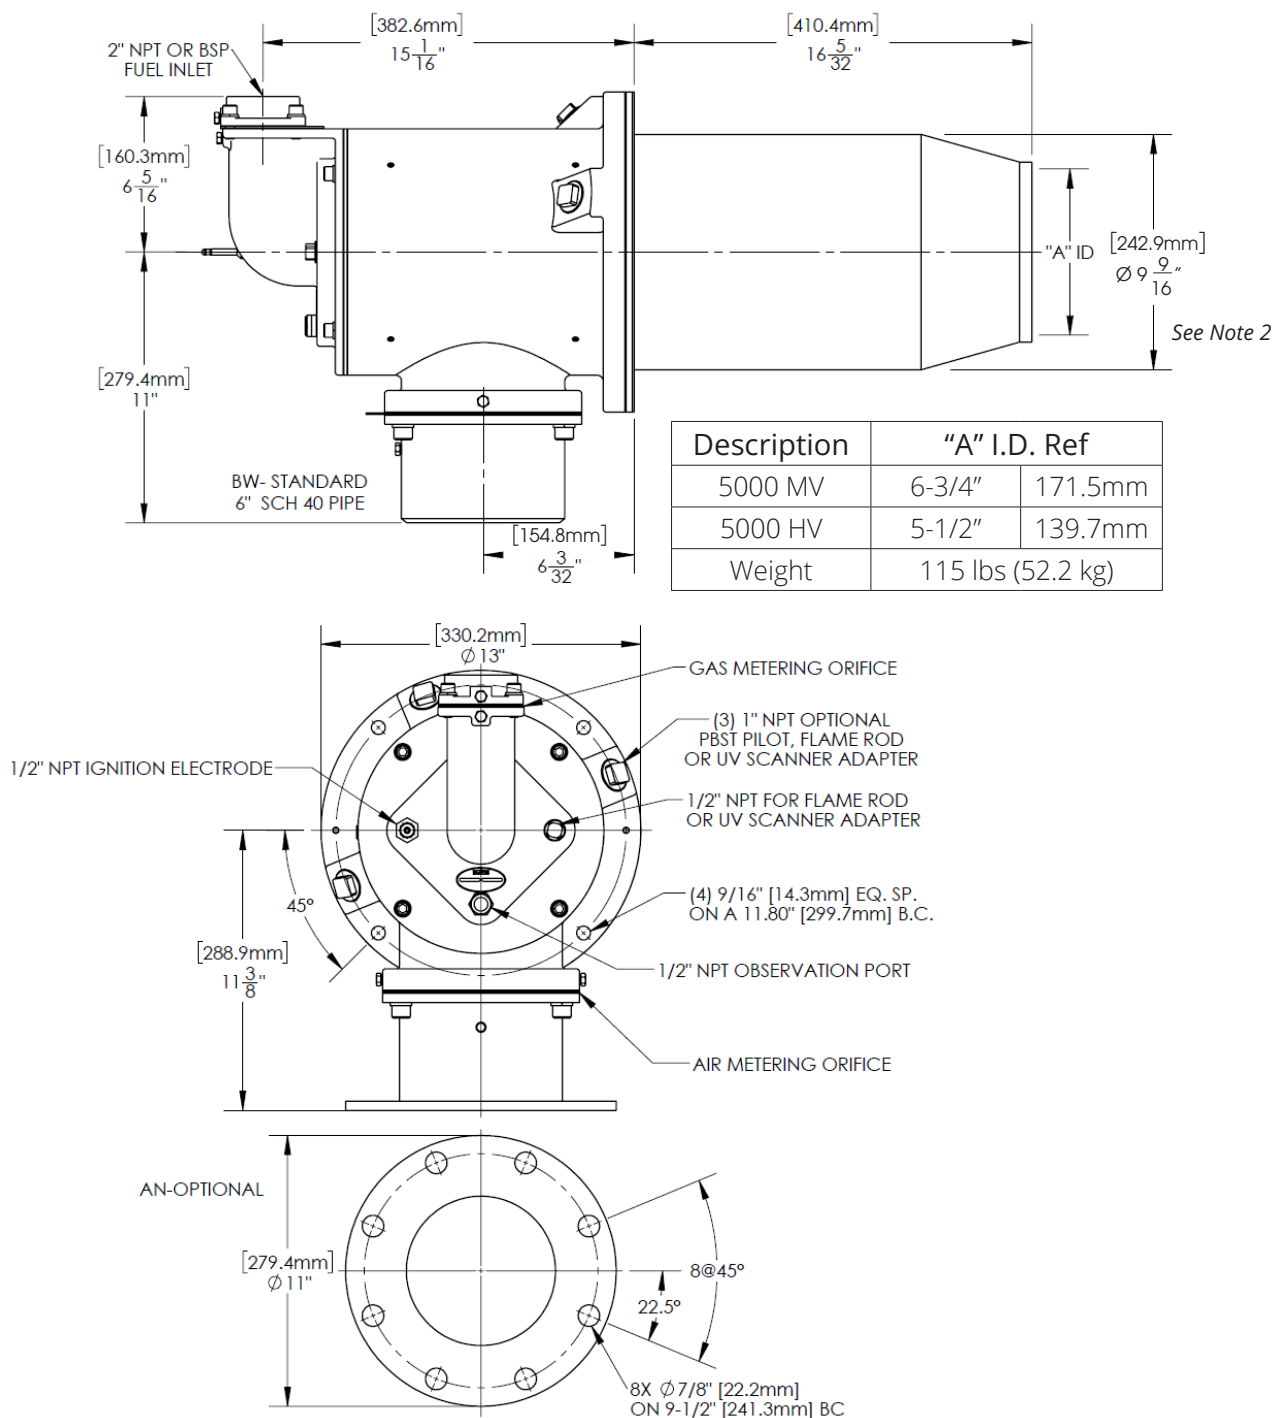

NOTES:

1. Gas connection can be repositioned in 90° increments
2. Allow 1/4" gap around discharge sleeve when cutting opening into the furnace shell.
3. Selas practices a policy of continuous improvement in the design of its products and so dimensions shown are subject to change. Please contact Selas to confirm critical dimensions.

11012 Aurora Hudson Rd • Streetsboro, OH 44241

1-800-523-6500 • sales@selas.com

www.selas.com

selas®

The Heat Technology Company™