



Refrak Screen Burners

S123 Burner Drawing

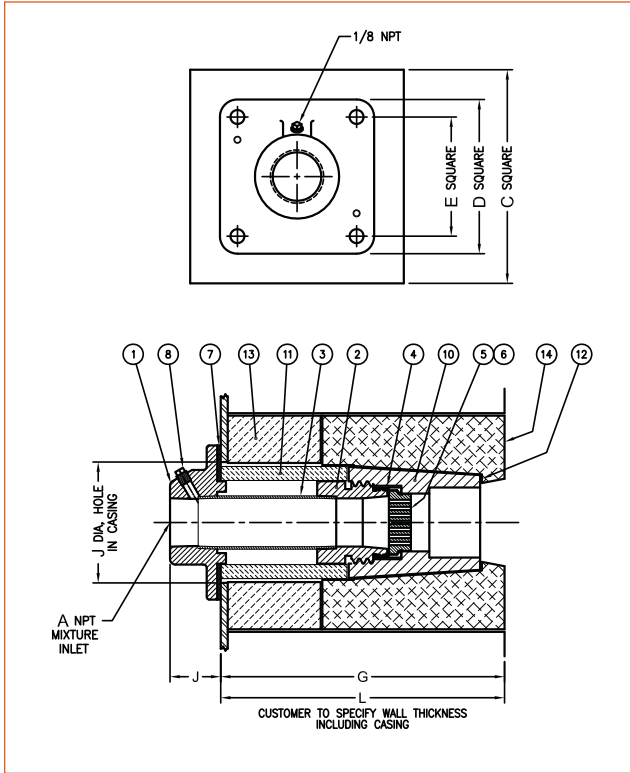

S123 Burner Selection Chart

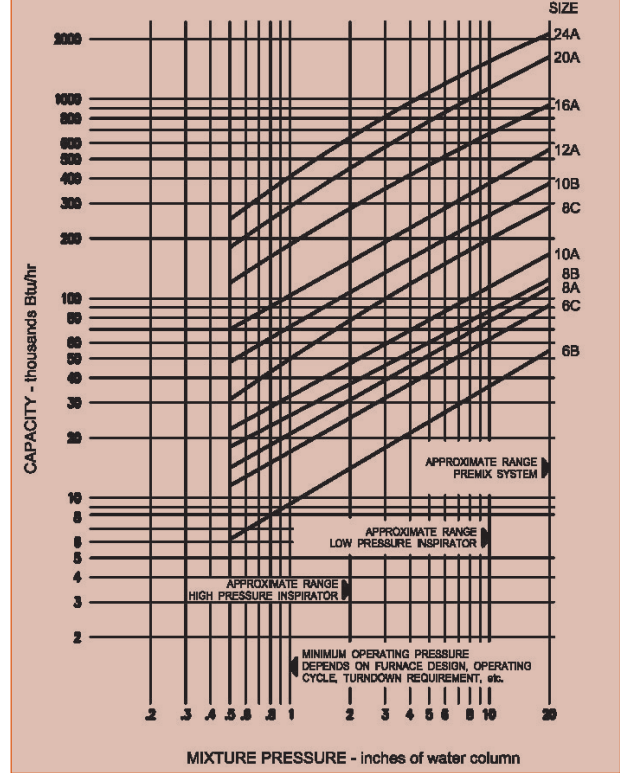

S123 Burner Dimension Schedule

SIZE	CATALOG NO.	PORT AREA (Sq. In.)	BURNER LENGTHS "L" AVAILABLE																		
			A	B	C	D	E	G	J	6 1/4	6 3/4	7 1/4	8 1/4	9 1/4	10 1/4	10 3/4	11 1/4	11 3/4	12 1/4	12 3/4	13 3/4
6B	S123-6B	.099	3/4	2 7/8	5	4 1/4	3	4	1 9/16	•	•	•	•	•	•	•	•	•	•	•	•
6C	S123-6C	.155																			
8A	S123-8A	.194																			
8B	S123-8B	.226	1	2 7/8	5	4 1/4	3	4	1 9/16	•	•	•	•	•	•	•	•	•	•	•	•
8C	S123-8C	.407																			
10A	S123-10A	.218	1 1/4	4 5/16	7 5/8	5 1/2	4 1/4	6 1/2	1 13/16				•	•	•	•	•	•	•	•	•
10B	S123-10B	.704																			
12A	S123-12A	.964	1 1/2	4 5/16	7 5/8	5 1/2	4 1/4	6 1/2	1 13/16				•	•	•	•	•	•	•	•	•
16A	S123-16A	1.85	2	7	10 1/4	8 3/4	7	8 1/2	2 1/8							•	•	•	•	•	•
20A	S123-20A	2.78	2 1/2	7	10 1/4	8 3/4	7	8 1/2	2 1/8							•	•	•	•	•	•
24A	S123-24A	4.22	3	7	10 1/4	8 3/4	7	8 1/2	2 1/8							•	•	•	•	•	•

