

Selas Superflame™ Burners

Superflame™ 7500

Capacity: 7,500,000 Btu/hr (1978 kW)

Parameter	Burner Velocity		Superflame™ 5000
Maximum Input, Btu/hr (kW)¹	Medium and High Velocity		7,500,000 (1978)
Minimum Input, Btu/hr (kW)¹ <i>For lower inputs, contact Selas</i>	Medium and High Velocity		750,000 (198)
Minimum Input Fixed Air, Btu/hr (kW)¹	Medium and High Velocity		187,000 (49)
Main Gas Inlet Pressure, "w.c. (mbar)	High Velocity	Natural Gas	10.2 (25)
	Medium Velocity	Natural Gas	7.3 (18)
Air Inlet Pressure, "w.c. (mbar)	High Velocity	Natural Gas	14.9 (37)
	Medium Velocity	Natural Gas	12.4 (31)
High Fire Visible Flame Length, inches (mm)	High Velocity	Natural Gas	105 (2670)
	Medium Velocity	Natural Gas	120 (3050)
Approximate Flame Velocity, ft/s (m/s)	High Velocity		400 (122)
	Medium Velocity		260 (79)
Maximum Combustion Air Temperature	700°F (371°C)		
Flame Detection	Flame rods or UV scanners can be used with all combustors, any gaseous fuel ² , and up to the maximum operating temperature.		
Fuels	Natural Gas ²		

- All imperial inputs based upon gross calorific values (HHV). All metric inputs based upon net calorific values (LHV).
- Consult Selas for other fuels.
- Other notes:
 - > All information is based on laboratory testing in neutral (0 "w.c., 0 mbar) pressure chamber. Different chamber conditions may affect emissions and pressure.
 - > All information is based on standard outer tube design. Changes in combustor will alter performance and pressures.
 - > All inputs based upon standard conditions; 1 atmosphere, 70°F (21°C). Fuel composition at 1000 BTU / ft³ HHV for natural gas.
 - > Selas reserves the right to change the construction and/or configuration of our products at any time without being obliged to adjust earlier supplies accordingly.
 - > Plumbing of air and gas will affect accuracy of orifice readings. All information is based on generally acceptable air and gas piping practices.




The Heat Technology Company™


Selas Superflame™ Burners

Performance Graphs, Imperial

SuperFlame 7500 Natural Gas Pressure

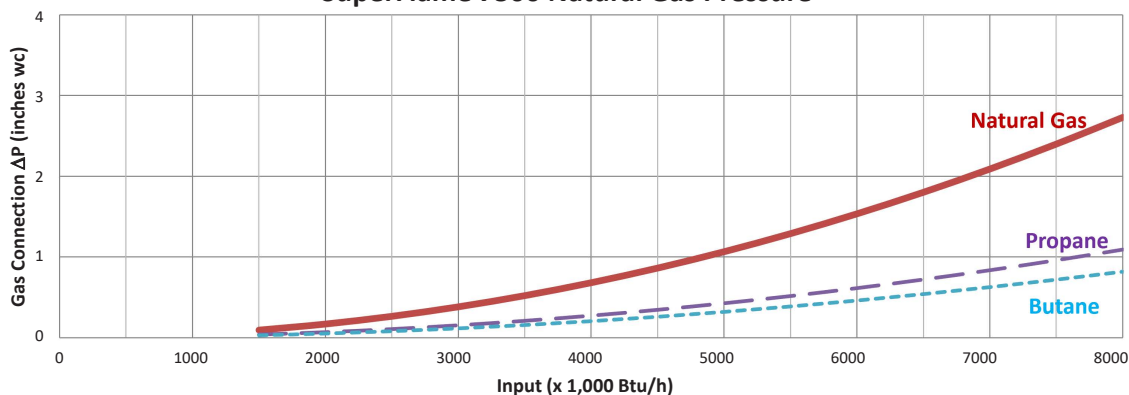


SuperFlame 7500 Air Pressure

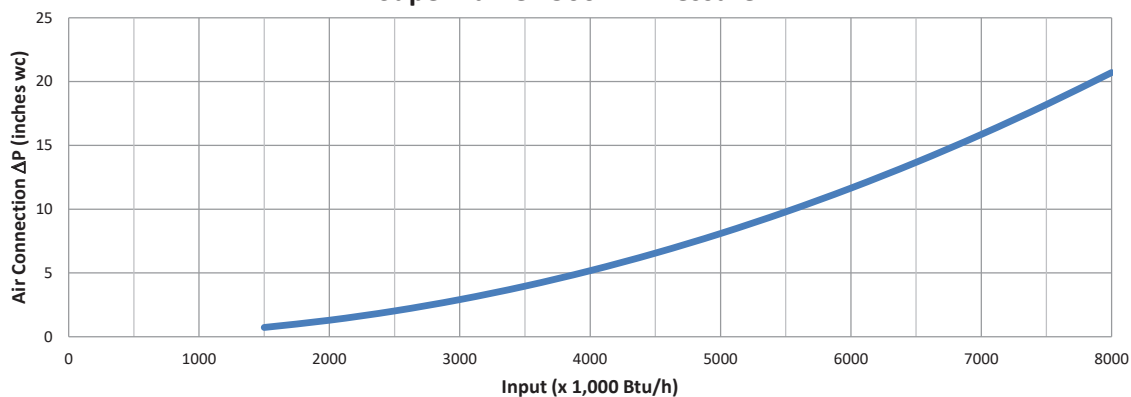

SuperFlame 7500 NOx Emissions

Furnace at 1600°F; Burner at 10% Excess Air



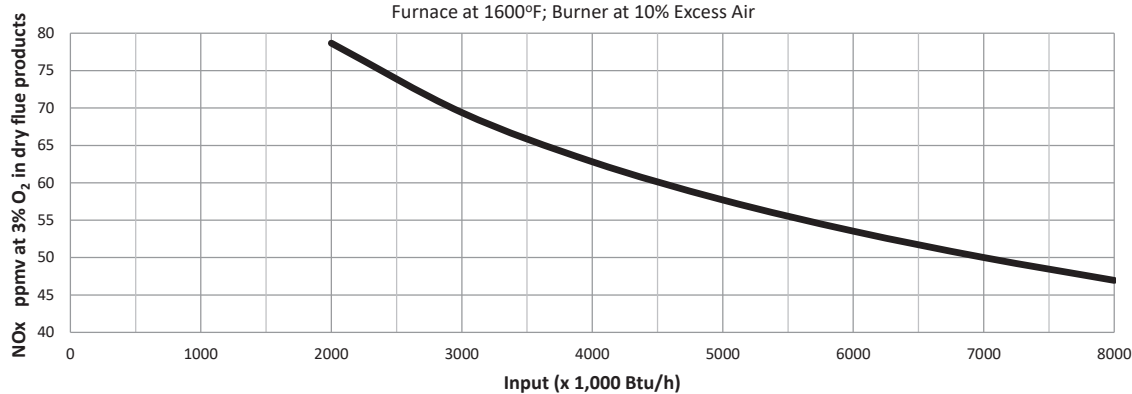


The Heat Technology Company™

Data Sheet

Selas Superflame™ Burners


Performance Graphs, Metric

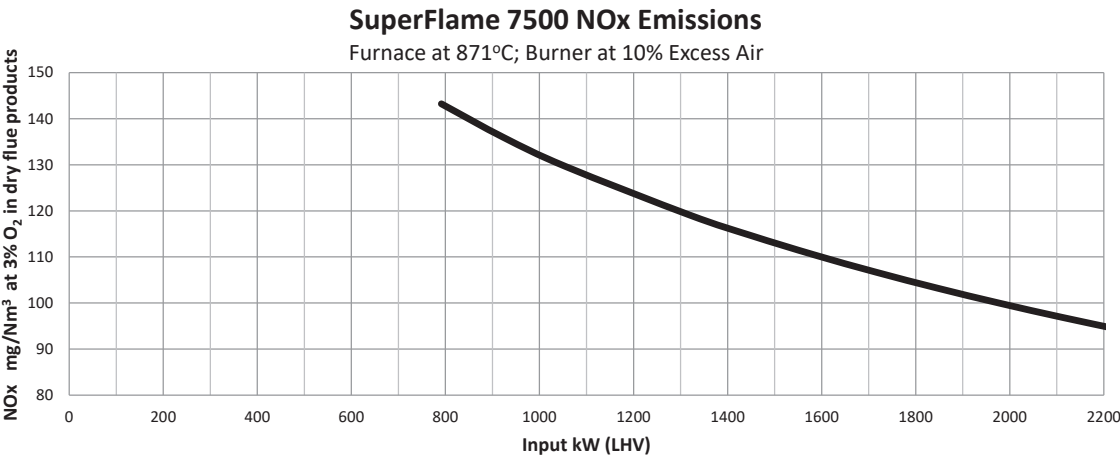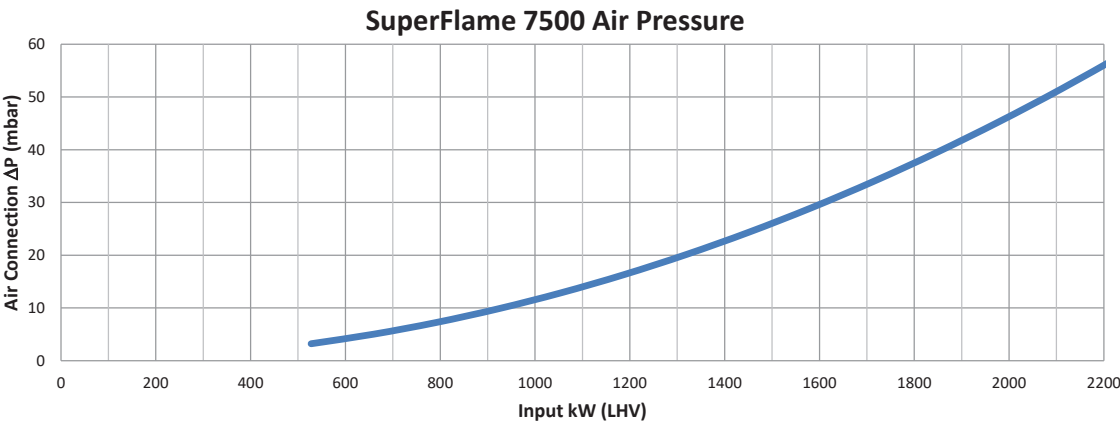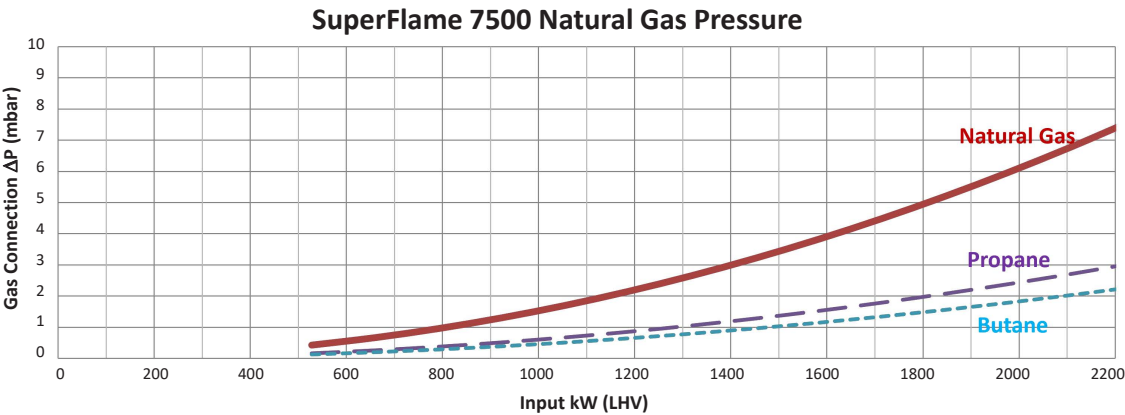

The Heat Technology Company™

Selas Superflame™ Burners

Superflame 7500 Drawing

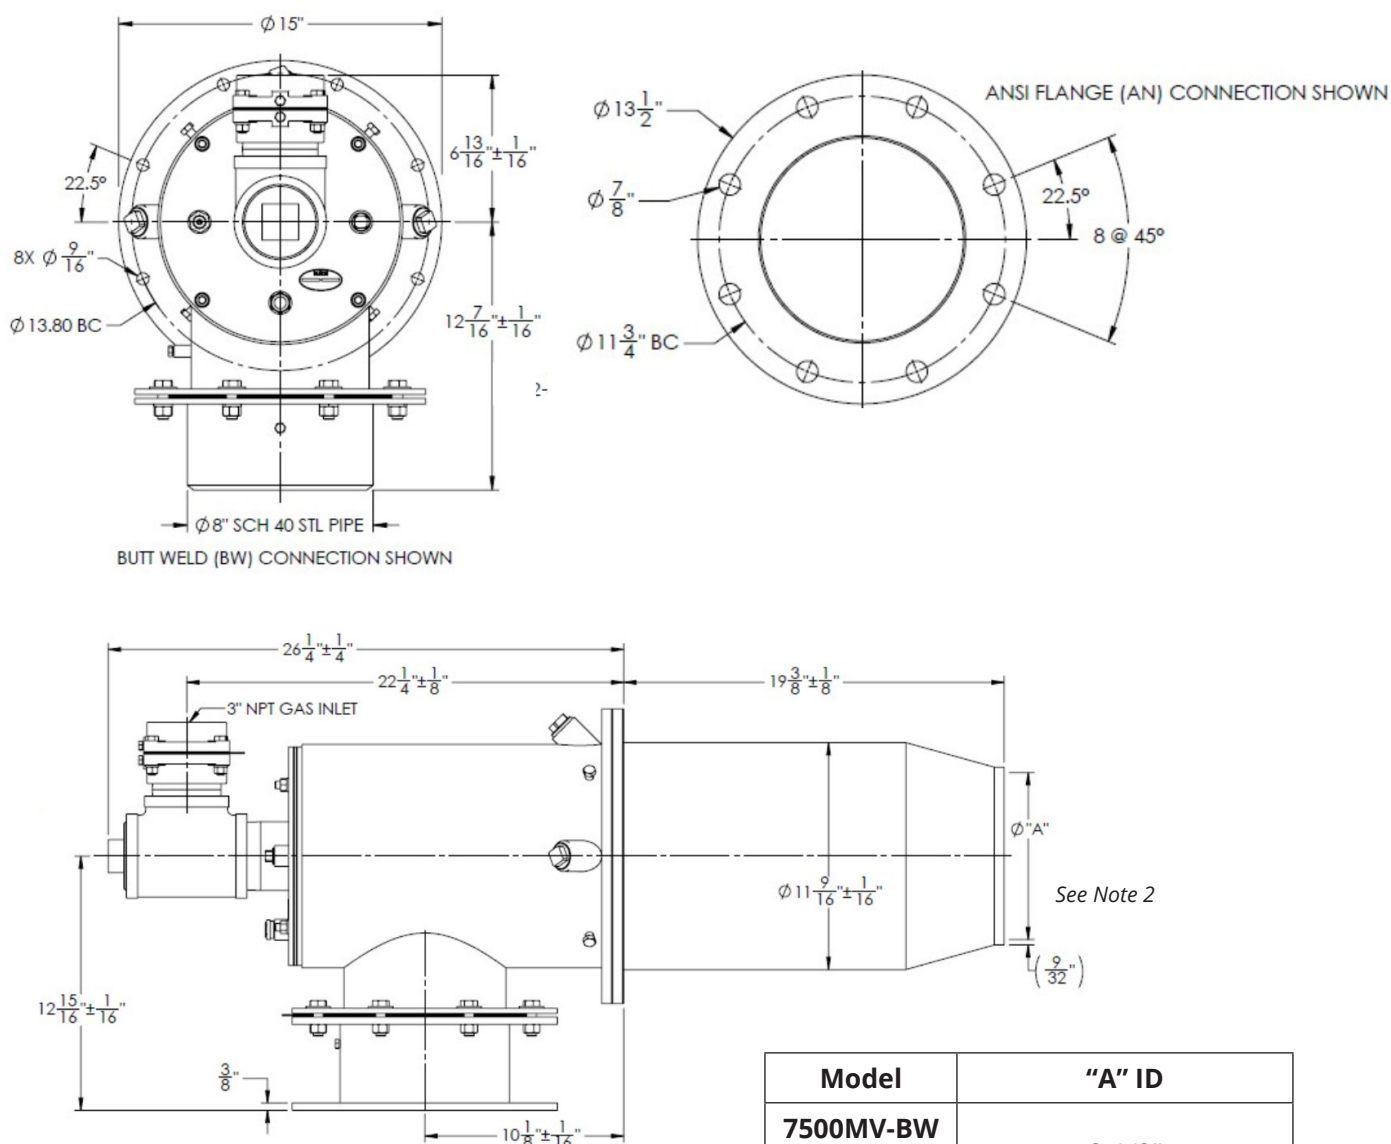

Model	"A" ID
7500MV-BW	8-1/2"
7500MV-AN	
7500HV-BW	6-3/4"
7500HV-AN	

NOTE: Gas and air inlets can be rotated in 90° increments.

NOTES:

1. Gas connection can be repositioned in 90° increments
2. Allow 1/4" gap around discharge sleeve when cutting opening into the furnace shell.
3. Selas practices a policy of continuous improvement in the design of its products and so dimensions shown are subject to change. Please contact Selas to confirm critical dimensions.

11012 Aurora Hudson Rd • Streetsboro, OH 44241

1-800-523-6500 • sales@selas.com

www.selas.com



The Heat Technology Company™